

FIG. 1

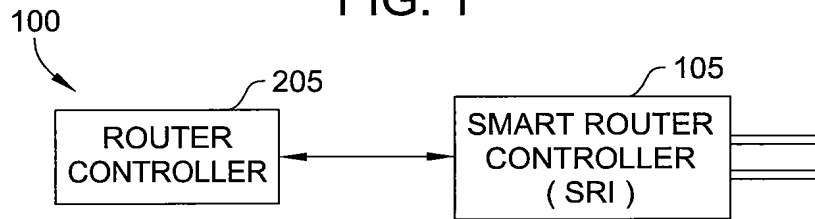


FIG. 2

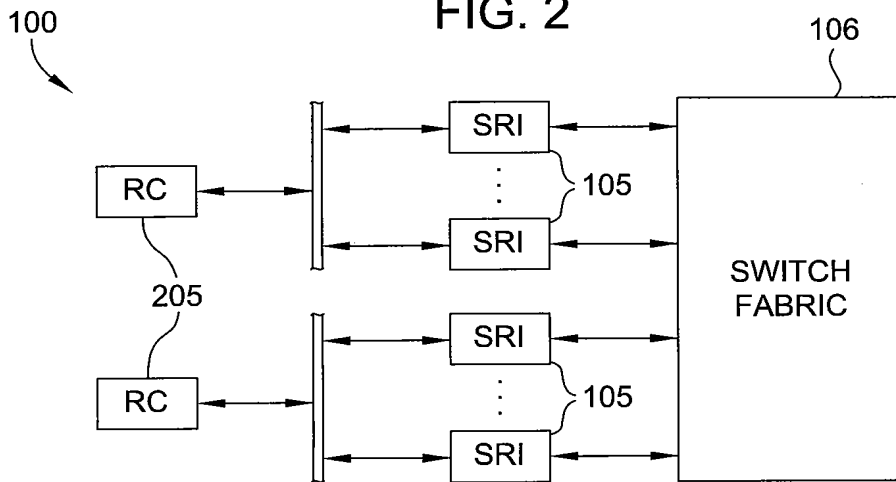


FIG. 3

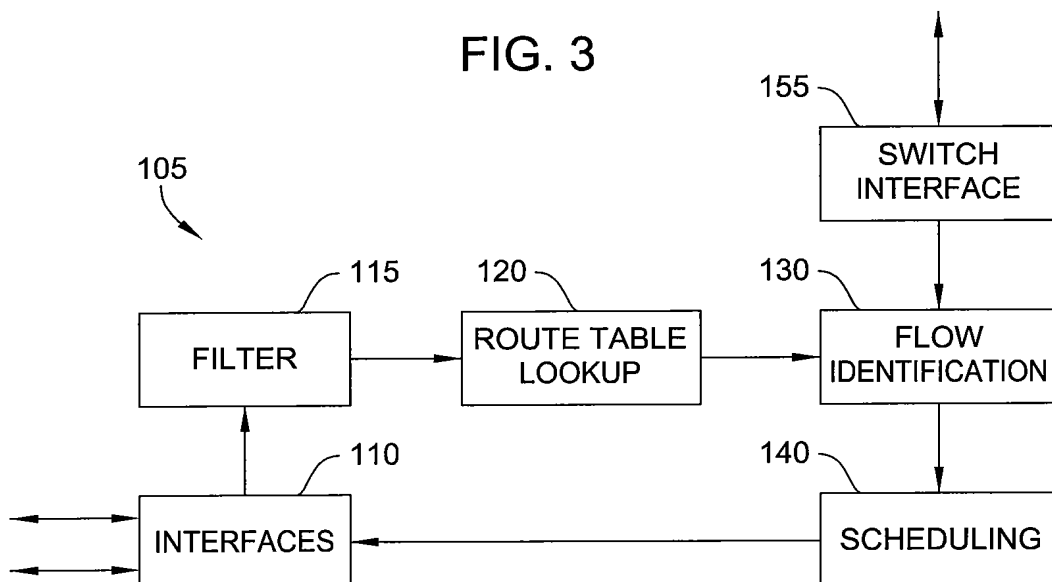


FIG. 4

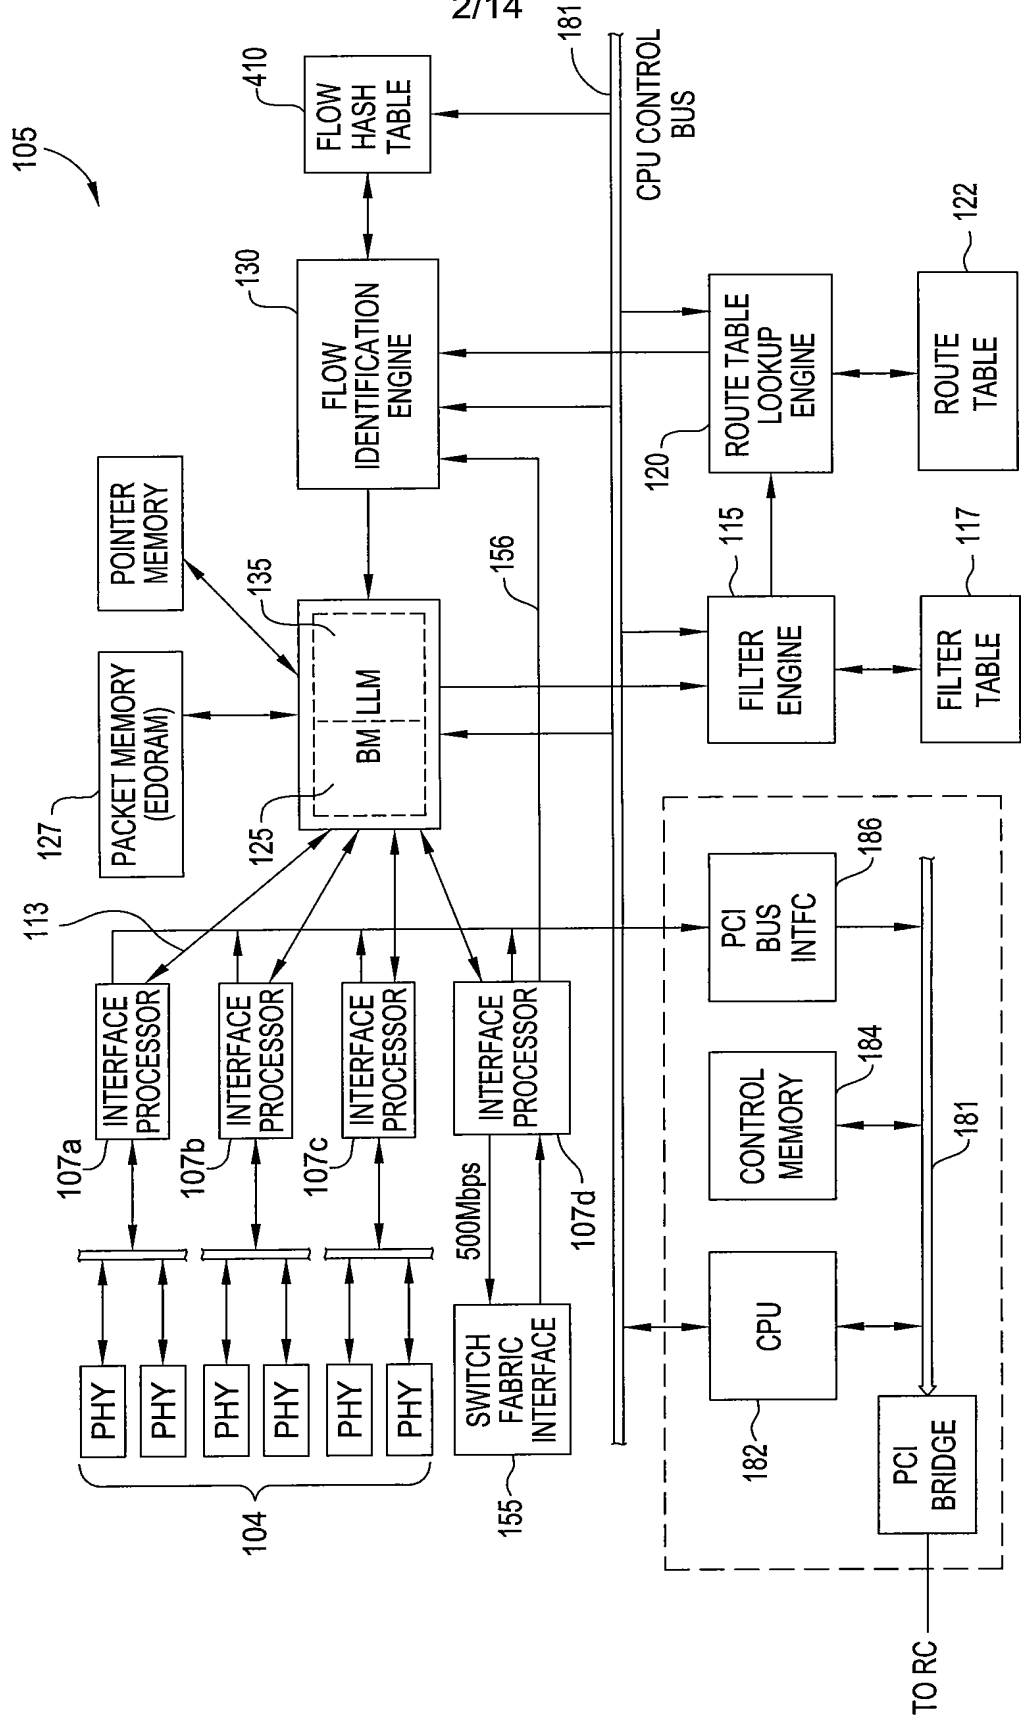


FIG. 5

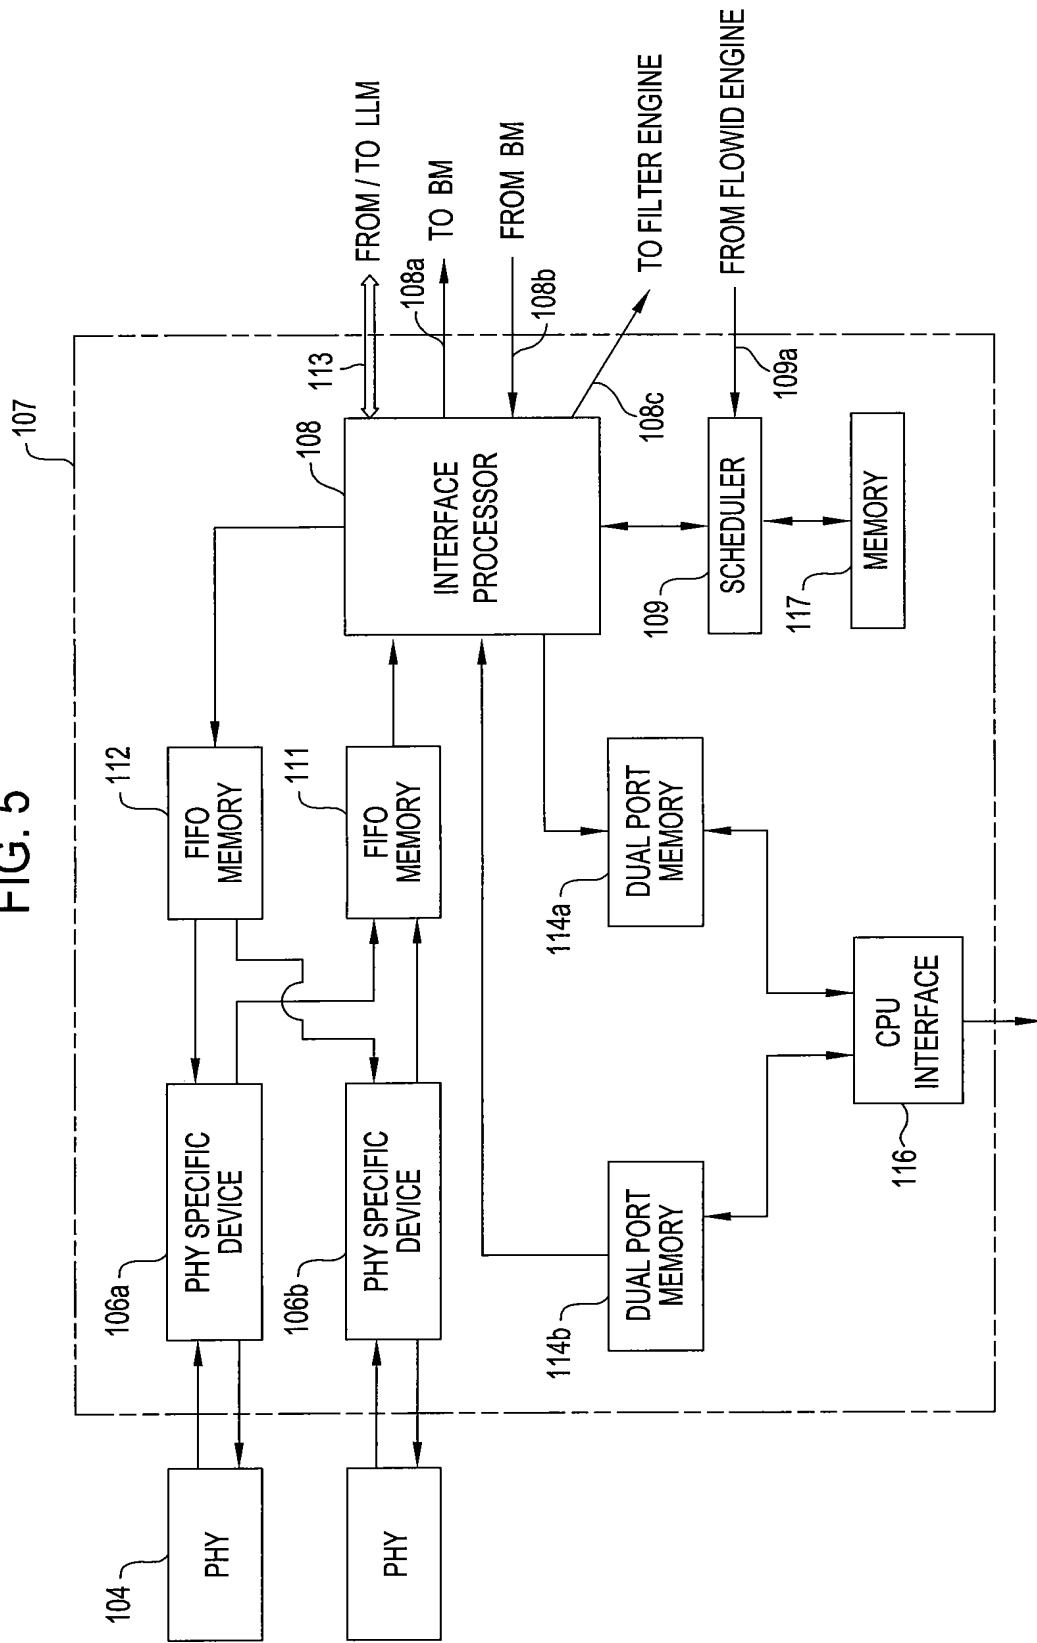


FIG. 6A

209			
	ADDRESS	HighByte	LowByte
206	1	DestinationAddress (31:24)	DestinationAddress (24:16)
	2	DestinationAddress (15:8)	DestinationAddress (7:0)
203	3	SourceAddress (31:24)	SourceAddress (23:16)
	4	SourceAddress (15:8)	SourceAddress (7:0)
211	5	Destination Port (15:8)	Destination Port (17:0)
209	6	Source Port (15:8)	Source Port (17:0)
213	7	Protocol (7:0)	TimeToLive (7:0)
219	8	PHY Index (7:0)	PollerIndex (7:0)
223	9	TypeOfService (7:0)	FrameType (7:0)
229	10	PacketLength (15:8)	PacketLength (7:0)
233	11	TunnelSource (31:24)	TunnelSource (23:16)
	12	TunnelSource (15:8)	TunnelSource (7:0)
	13	PageListHead (31:24)	PageListHead (23:16)
236	14	PageListHead (15:8)	PageListHead (7:0)
	15	ControlFlags (31:24)	ControlFlags (23:16)
239	16	ControlFlags (15:8)	ControlFlags (7:0)
	17	RecordRoute Option Offset (7:0)	Strict Source Option Offset / ICMP Type (7:0)
243	18	LooseSource Option Offset / ICMP Code (7:0)	QoS Parameters (23:16)
251	19	QoS Parameters (15:8)	QoS Parameters (7:0)
249	20	FlowQueueIndex (15:8)	FlowQueueIndex (7:0)
253	21	QoSClass (15:8)	QoSClass (7:0)
246	22	MACAddress (47:40)	MACAddress (39:32)
	23	MACAddress (31:24) / MulticastBitmap (31:24)	MACAddress (23:16) / MulticastBitmap (23:16)
	24	MACAddress (15:8) / MulticastBitmap (15:8)	MACAddress (7:0) / MulticastBitmap (7:0)

FIG. 6B

236

FLAG	BIT POSITION
IcmpError	1
LarrIpOption	2
SarrIpOption	3
RrlpOptiion	4
TimestampOption	5
DontFragment	6
EndSourceRoute	7
TunnellnPacket	8
RedirectPacket	18
MacInArpCache	19
ClassifyQueue	20
BandWidthSpecified	21
QueueSpecified	22
UpdateArpEntry	23
NeedArpPacket	24
PacketFromRc	25
IpInIpPacket	26
TunneledPacket	27
BroadcastPacket	28
MulticastPacket	29
RcPacket	30
DropPacket	31
PassPacket	32

237

239

235

FIG. 7


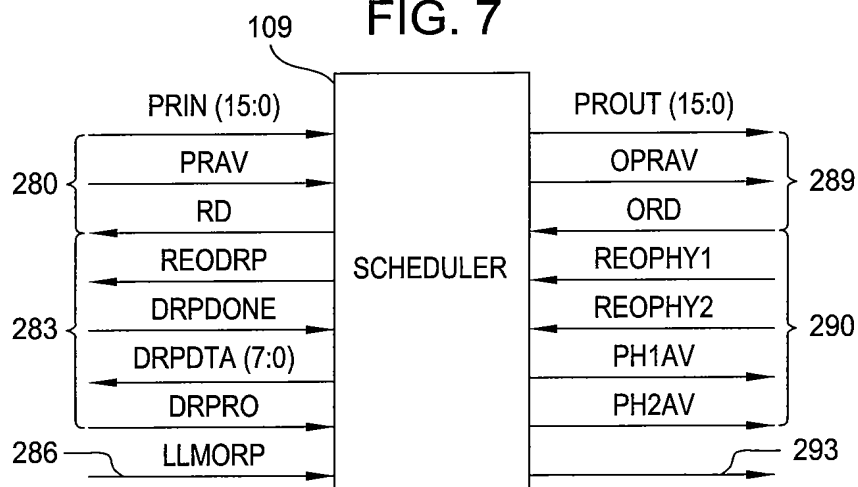


FIG. 8

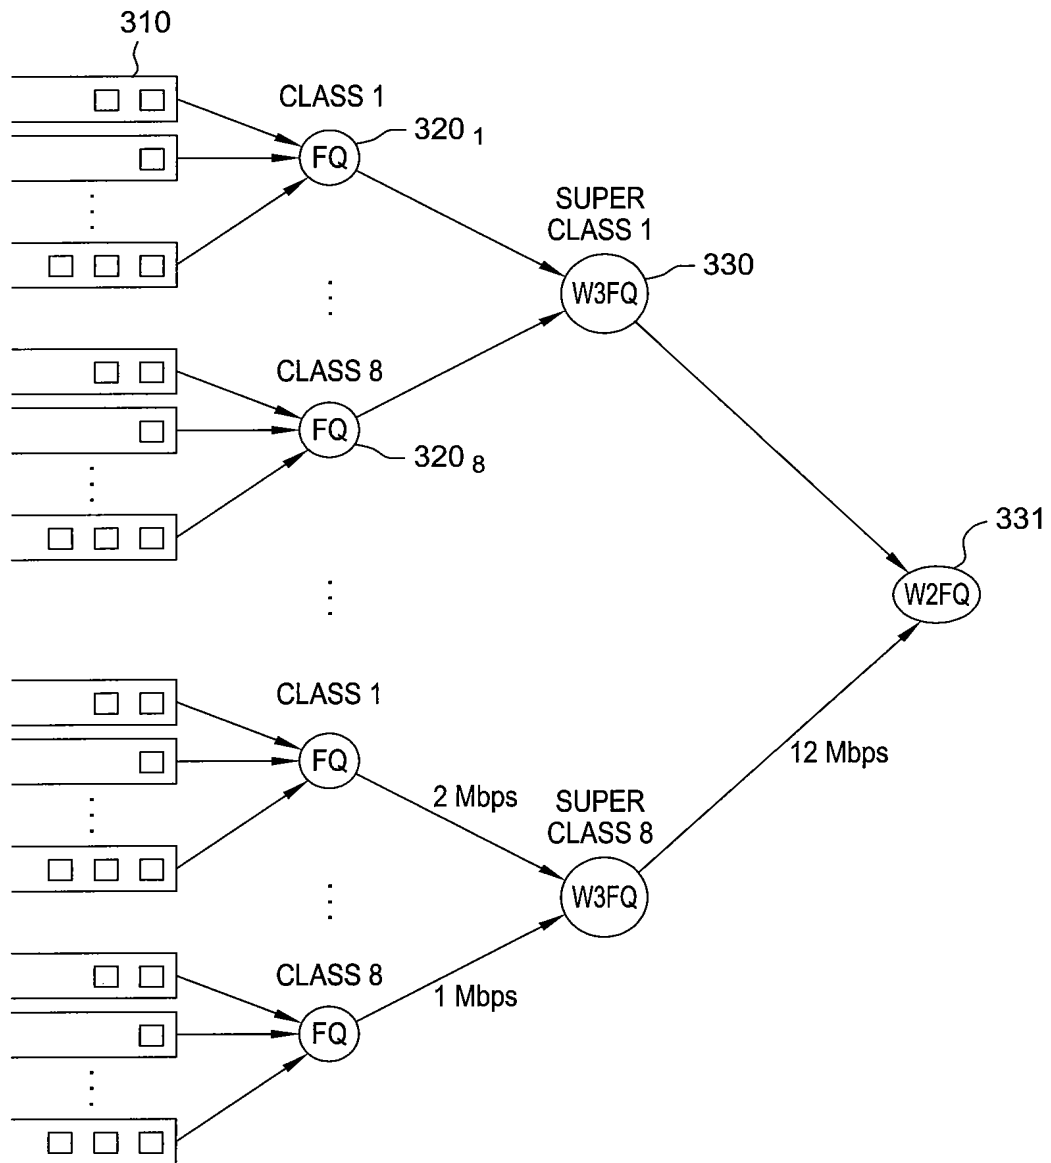

7/14

## FIG. 9A

Check if packet is multicast  
Store packet in packet record descriptor defined by PageList  
For each PHY that packet must be multicasted do  
    Add packet to queue Q[ I ];  
    Increase the size of queue I;  
    if (Packet DOES NOT HAVE OPTIONS) then  
        Increase the size of the queue associated with give PHY  
        Buffer management module should update statistics  
        if size of Q[ I ] >= 1 then  
            if packet is the first for SuperClass SC then  
                insert packet in main scheduler for SuperClass SC  
            else if packet is the first for Class C of SuperClass SC then  
                insert packet in class scheduler for SC for class C  
            else  
                insert packet to calendar queue corresponding to Class C and SuperClass SC  
        end if;  
    else  
        Insert Complete packet record in a linked list of packets with Options  
    end if;  
end for;

## FIG. 9B

Update global scheduler system potential;  
Search the global scheduler table for the superclass with the minimum FP;  
Dispatch packet for transmission;  
Update queue size of corresponding PHY;  
If packet is multicast to multiple Virtual Interfaces then  
    Dispatch packet for transmission multiple times, once for  
    each Virtual Interface  
end if;  
Search the SuperClass table for the next packet eligible packet;  
if (no more packets in superclass) then  
    exit;  
end if;  
Calculate new Starting and Finish potential of superclass;  
Add entry to global scheduler;  
Find the next packet for transmission within class  
if (no more packets within class) then  
    exit;  
end if;  
Calculate new Starting and Finish potential of class;  
Add entry to SuperClass Scheduler;  
Select next packet for transmission from the class calendar queue;  
add entry in the class scheduler;

FIG. 10


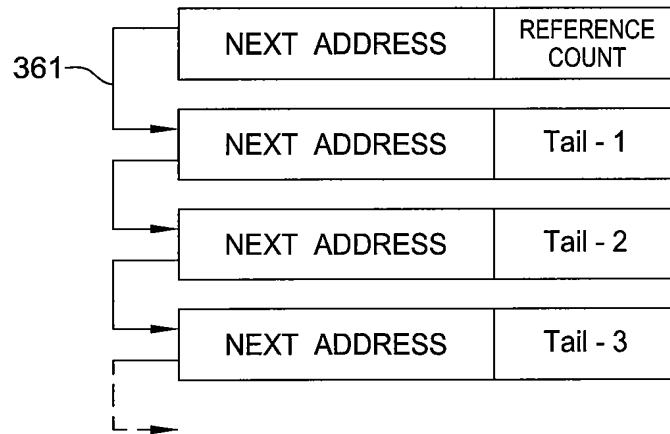


FIG. 11

```

If multicast packet then
    get multicast bitmap
    determine interface processors for forwarding packet
    forward packet record to all these interface processor
    use pointer to head of packet to access reference count and
    update it with the number of interfaces that packet must be
    forwarded.
Else
    use PollerIndex to determine outgoing interface processor
    Forward packet to interface processor
end if
Run buffer sizing algorithm
    
```

FIG. 14

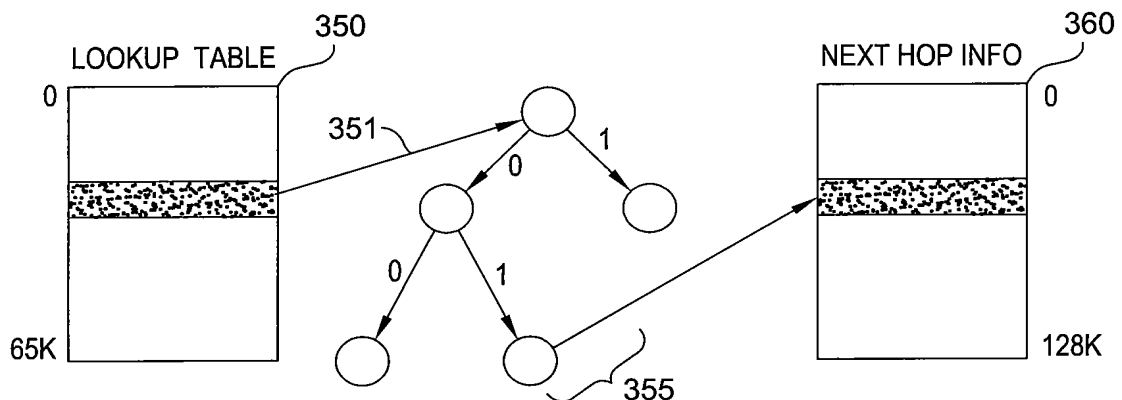



9/14

## FIG. 12A

INTP = INTERFACE PROCESSOR

On packet record arrival from the Flow ID.

If unicast packet then

Forward packet to INTP [ PollerIndex ]

BufferCounter [ PollerIndex ] + = PacketRecord [ Size ]

UnicastBuffers + = PacketRecord [ Size ]

else if multicast packet then

McastBufferCounter + = PacketRecord [ Size ]

If McastBufferCounter > McastThreshold then

McastBufferCounter - = PacketSize

drop packet record

else

Forward packet based on multicast bitmap to multiple pollers

end if

end if

Run Buffer Control Algorithm

## FIG. 12B

INTP = INTERFACE PROCESSOR

On packet deletion

If unicast packet then

BufferCounter [ INTP ] - = PacketSize

UnicastBuffers - = PacketSize

OutStandingBuffers [ INTP ] - = PacketSize

TotalOutstanding - = PacketSize

else if multicast packet then

McastBufferCounter - = PacketSize

end if

## FIG. 13

Buffer Size Control

TotalBuffers = McastBufferCounter + UnicastBuffers

Overflow = MAXBUFFERS - TotalBuffers + TotOutstanding

if Overflow then

select poller such that

BufferCounter [ Poller ] - Outstanding [ Poller ] > MAXBUF [ Poller ]

Send delete signals to that poller for a total of

min ( Overflow, MAXBUF [ Poller ] ) packets;

Outstanding [ Poller ] + = min ( Overflow, MAXBUF [ Poller ] );

TotalOutstanding + = min ( Overflow, MAXBUF [ Poller ] );

end if

10/14

## FIG. 15A

```
1. if ( PacketRecord [ Control ] & ( IcmpError | DropPacket | RcPacket ) then
2.     go to FORWARD
3. end if;
4. using 16 most significant bits for hashing
5. Search corresponding tree
6. Match corresponding router entry
7. if ( RouterEntry [ Flags ] & RcAddress ) then
8.     PacketRecord [ control ] | = RcPacket;
9. end if;
10. if ( PacketRecord -> Protocol = IPPROTO_IGMP ) | ( PacketRecord -> DestinationAddress >= 0x00000000 ) &&
11.     ( PacketRecord [ DestinationAddress ] <= 0xe00000ff ) then
12.     PacketRecord [ Control ] | = RcPacket;
13.     go to FORWARD
14. end if;
15. if ( No TreeNode or No Route Entry ) then
16.     if ( PacketRecord [ Control ] && SrrlpOption )
17.         PacketRecord [ ICMP_CODE ] = ICMP_UNREACHABLE_SOURCE_FAIL
18.     else
19.         PacketRecord [ ICMP_CODE ] = ICMP_UNREACHABLE_NET :
20.     else if;
21.         PacketRecord [ ICMP_TYPE ] = ICMP_UNREACHABLE
22.         PacketRecord [ CONTROL ] = ICMP_ERROR
23.         go to FORWARD
24.     end if;
25. if ( PacketRecord [ Control ] & UpdateArpEntry ) then
26.     If ( RouteEntry exists ) then
27.         PacketRecord [ MacAddress ] = RouterEntry
28.     else
29.         PacketRecord [ Control ] | = MacInArpCache
30.     end if;
31.     go to FORWARD
32. end if;
33. if ( ( PacketRecord [ Control ] & SrrlpOption ) && ( RouteEntry [ Flags ] & Point2Point ) )
34.     PacketRecord [ IcmpType ] = ICMP_UNREACHABLE
35.     PacketRecord [ IcmpCode ] = ICMP_UNREACHABLE_SOURCE_FAIL
36.     PacketRecord [ Control ] | = ICMP_ERROR | DROP_PACKET;
37.     go to FORWARD
38. end if;
39. if ( ( RouteEntry [ PollerIndex ] = PacketRecord [ PollerIndex ] ) &&
40.     ( RouteEntry [ PhyIndex ] = PacketRecord [ PhyIndex ] &&
41.     ( PacketRecord [ DestinationAddress ] > 0 ) &&
42.     ( PacketRecord [ SourceAddress ] & TreeNode [ SubnetMask ] = RouteEntry [ NextHop ] ) ) then
43.     PacketRecord [ RouteEntry ] = RouteEntry;
44.     PacketRecord [ ICMPTYPE ] = ICMP_REDIRECT;
45.     PacketRecord [ Control ] = ICMP_ERROR | DROP_PACKET;
46.     go to FORWARD
47. end if;
```

11/14

## FIG. 15B

```
49. PacketRecord [ PHYIndex ] = RouteEntry [PHYIndex ];
50. PacketRecord [ PollerIndex ] = RouteEntry [ PollerIndex ];
51. if ( RouteEntry [ flags ] & Gateway ) then
52.     PacketRecord [ Control ] | = MacInArpCache;
53.     go to FORWARD
54. end if;
55. if ( NOT ( RouteEntry [ Flags ] & ValidMacFlag )) then
56.     PacketRecord [ Control ] | - NeedArpPacket;
57.     PacketRecord [ MacAddress ] = RouteEntry
58.     go to FORWARD;
59. end if;
60. PacketRecord [ MacAddress ] = RouteEntry [ MacAddress ];
61. FORWARD;
62.     forward packet to Flow Identification
```

## FIG. 16

```
1. If ( ClassifyFlag = 1 ) then
2.     Hash_Index = Hash ( Source Address, Destination Address, Source Port, Destination Port, Prot );
3.     FlowRecord = Hash_Table ( Hash_Index );
4.     if ( FlowRecord = NULL ) then
5.         FlowRecord = random (1.64K );
6.     end if;
7.     If ( fields in flow record match with fields in packet record ) then
8.         update QoS parameters of packet record
9.         update statistics in flow record
10.    else
11.        Clear statistics of flow record.
12.        Replace fields of flow record from fields in packet record
13.        Update QoS parameters of packet record.
14.    End if;
15. end if;
16. if ( MacInArpCache = 1 ) then
17.     MacIndex = DestinationAddress (15 downto 0 );
18.     MacTag = MacTable ( MacIndex );
19.     if ( MacTag = DestinationAddress ( 31 downto 16 ) ) then
20.         Update MAC address in packet record
21.     else
22.         Set NeedArp flag
23.     end if;
24. end if;
25. update packet record and transmit it
```

FIG. 17A

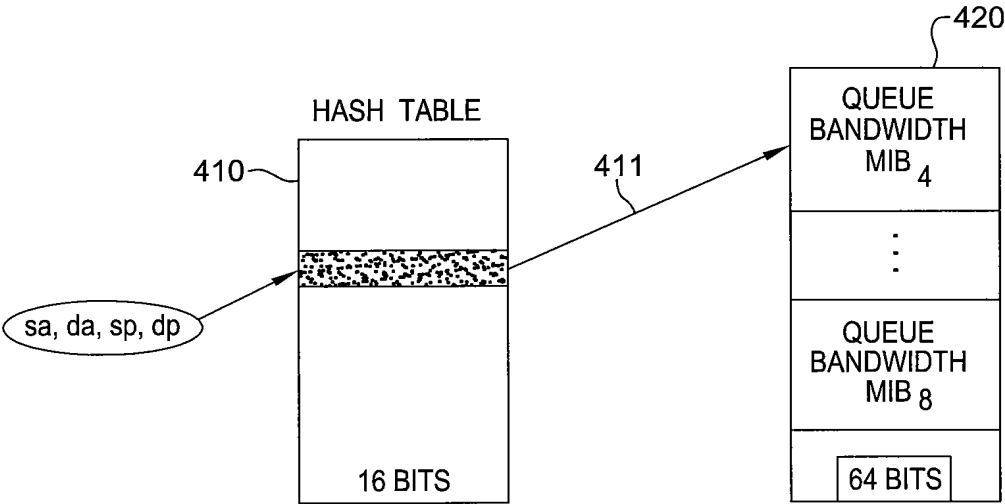


FIG. 17B

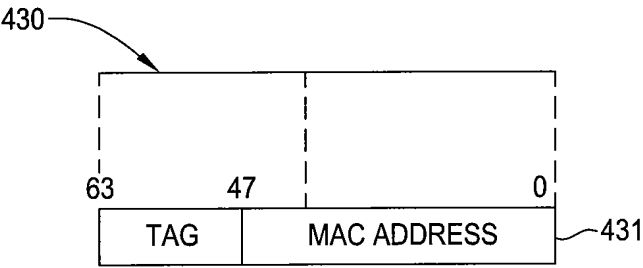


FIG. 18

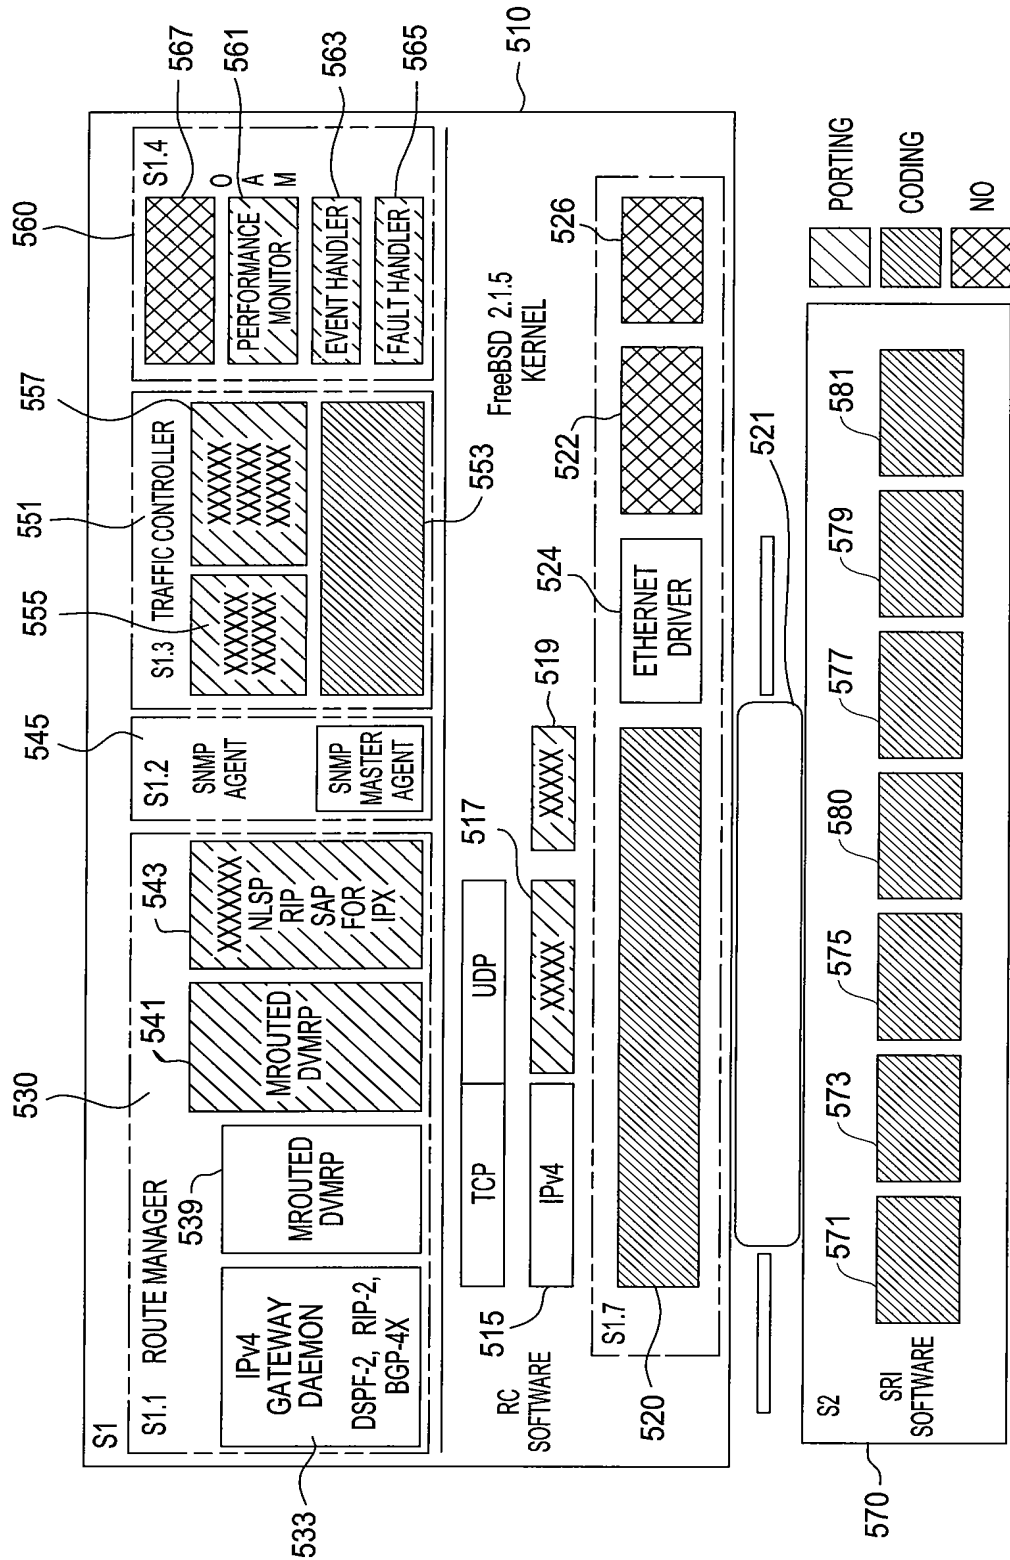


FIG. 19

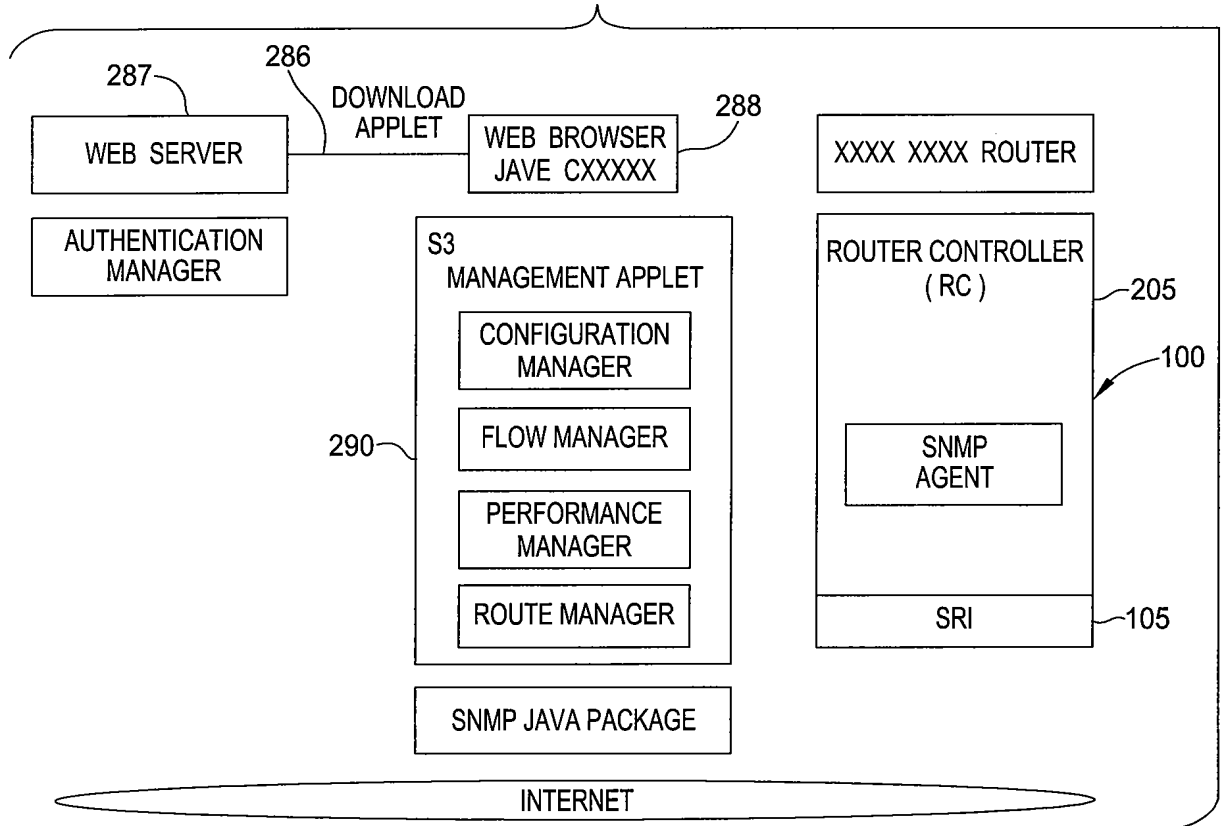


FIG. 20

